
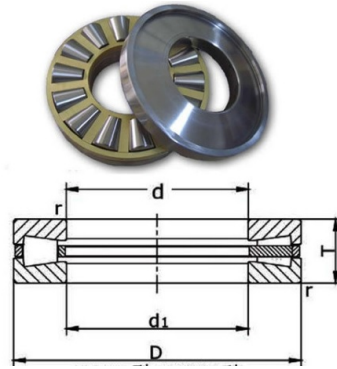


Thrust Tapered Roller Bearing

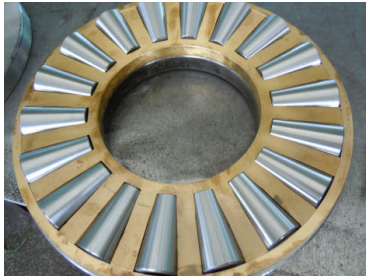

Seleccione Consulta Designacion			Dimensiones principales (mm)			Capacidades de carga básica (KN)		límite de carga (KN)	Masa (kilogramo)
			D	D	T	Cr	Cor		
350980 C	170	240	84	330	1290	104	12,5		
353162	180	280	90	561	2400	193	22		
351019 C	220	300	96	440	1660	132	20		
351182 C	240	320	96	418	1900	143	21,5		
353005	250	380	100	897	4550	335	43,5		
350981 C	260	360	92	605	2600	193	28		
351164 C	270	450	180	1650	6000	455	120		
353194	305,07	530	200	2380	10600	680	185		
353102 A	320	440	108	990	5000	335	48,5		
350982 C	320	470	130	1300	5700	405	80		
351100 C	350	490	130	1170	5100	345	73,5		
353006	350	540	135	1720	9150	620	115		
351175 C	380	560	130	1790	10000	670	110		
353204	380	650	215	3360	16600	1060	275		
353106	400	650	200	2700	13700	815	235		
353106 C	400	650	200	2700	13700	815	235		
353106 D	400	650	200	2700	13700	815	230		
351121 C	420	620	170	2420	12200	800	185		
353152	440	645	167	1980	10800	695	190		

Thrust Tapered Roller Bearing

350916 D	450	645	155	1980	10800	695	170
353151	470	720	200	3410	17600	1100	285
351301 C	470	720	200	3410	17600	1100	285
351475 C	530	710	218	2200	11000	695	245
350976 C	550	760	230	2920	13200	830	310
350824	600	880	290	4730	21200	1270	550
350901 C	600	910	290	4730	21200	1270	655
351761 A	670	900	230	3580	19000	1120	425
T661	170	-	305	-	-	560	21.4
68TR	174.625	-	358.775	-	-	480	42.8
T709	177.8	-	43.8	-	-	400	83.4